

Capacidades de elevación de pluma principal

9 t



6,40 x 6,75 m

360°


Pluma Principal





85%

Radio m	m	10.1	16.1	22.1	28.0	32.5	37.0	40.0	10.1	16.1	Radio
3	55.0 *	-	-	-	-	-	-	-	-	-	3
3	50.0	-	-	-	-	-	-	-	15.2	-	3
3,5	47.0	30.1	-	-	-	-	-	-	14.3	14.8	3,5
4	42.2	30.1	18.7	-	-	-	-	-	12.6	13.2	4
4,5	38.3	30.1	18.7	15.3	-	-	-	-	11.3	11.9	4,5
5	36.6	30.1	18.7	15.3	12.0	-	-	-	10.6	11.3	5
6	30.1	28.1	18.7	15.3	12.0	9.9	-	-	8.4	9.1	6
7	24.0	23.0	18.7	15.3	12.0	9.9	7.6	-	6.1	6.7	7
8	-	18.0	17.6	14.5	12.0	9.9	7.6	-	-	5.5	8
9	-	16.3	16.2	13.6	11.6	9.9	7.6	-	-	4.7	9
10	-	13.4	13.5	12.6	10.9	9.8	7.6	-	-	3.7	10
12	-	10.1	10.6	10.0	9.8	8.8	7.6	-	-	2.8	12
14	-	-	8.1	8.4	7.6	7.7	6.8	-	-	-	14
16	-	-	6.7	6.8	6.3	6.3	6.2	-	-	-	16
18	-	-	5.4	5.6	5.4	5.3	5.0	-	-	-	18
20	-	-	-	4.7	4.8	4.4	4.1	-	-	-	20
22	-	-	-	4.0	4.1	3.6	3.3	-	-	-	22
24	-	-	-	3.2	3.3	2.9	2.7	-	-	-	24
26	-	-	-	-	2.9	2.5	2.2	-	-	-	26
28	-	-	-	-	2.3	2.1	1.7	-	-	-	28
30	-	-	-	-	-	1.7	1.4	-	-	-	30
32	-	-	-	-	-	1.2	1.0	-	-	-	32
34	-	-	-	-	-	-	0.8	-	-	-	34


Dimensiones

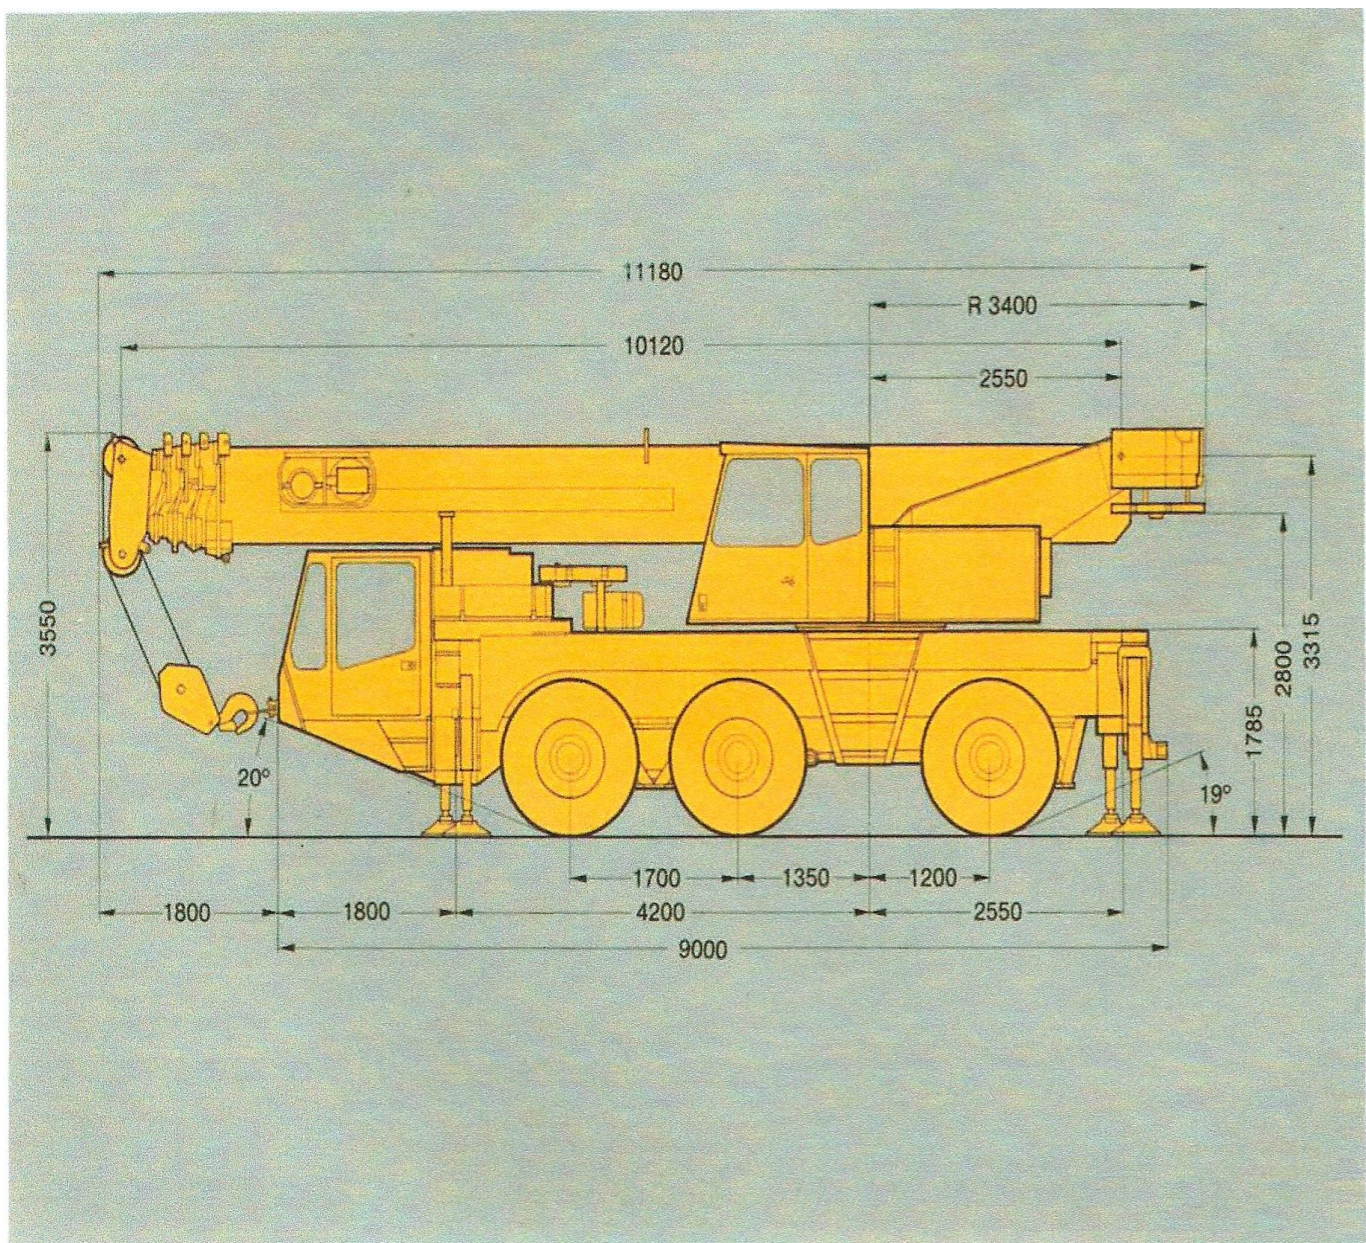

Dimensiones

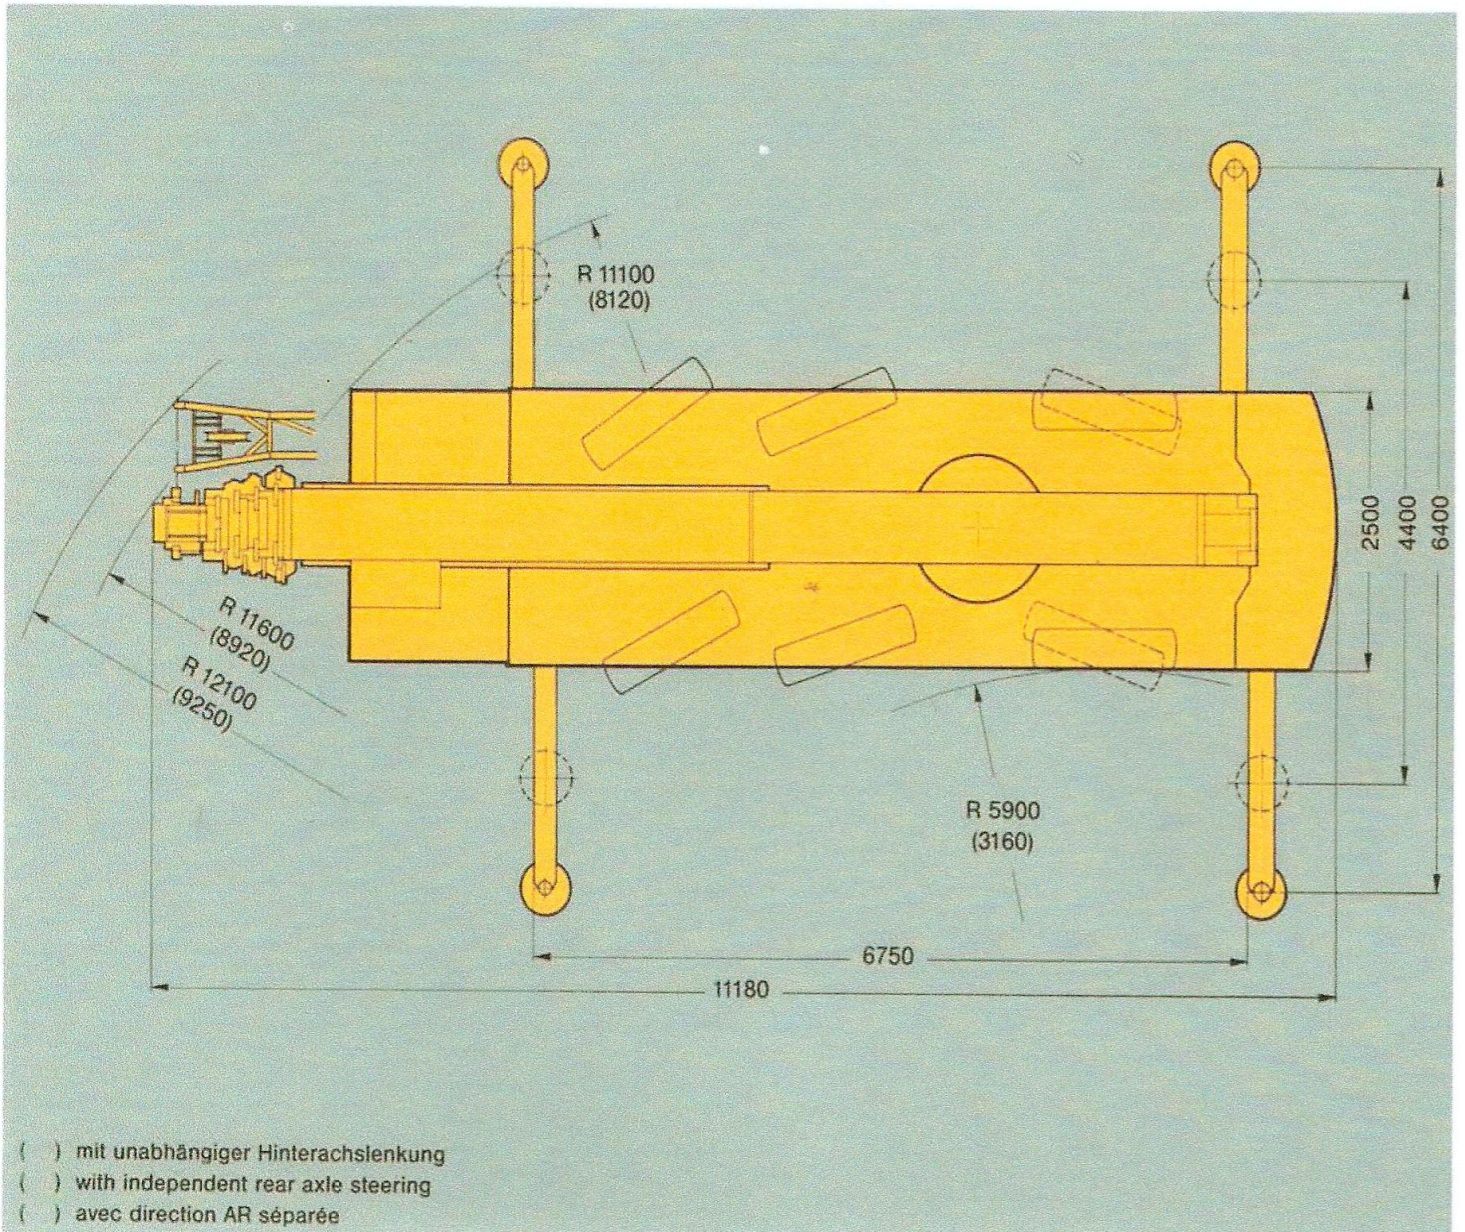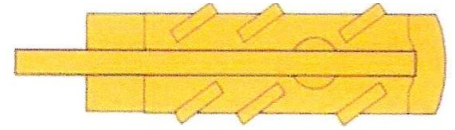

Rango de trabajo pluma principal

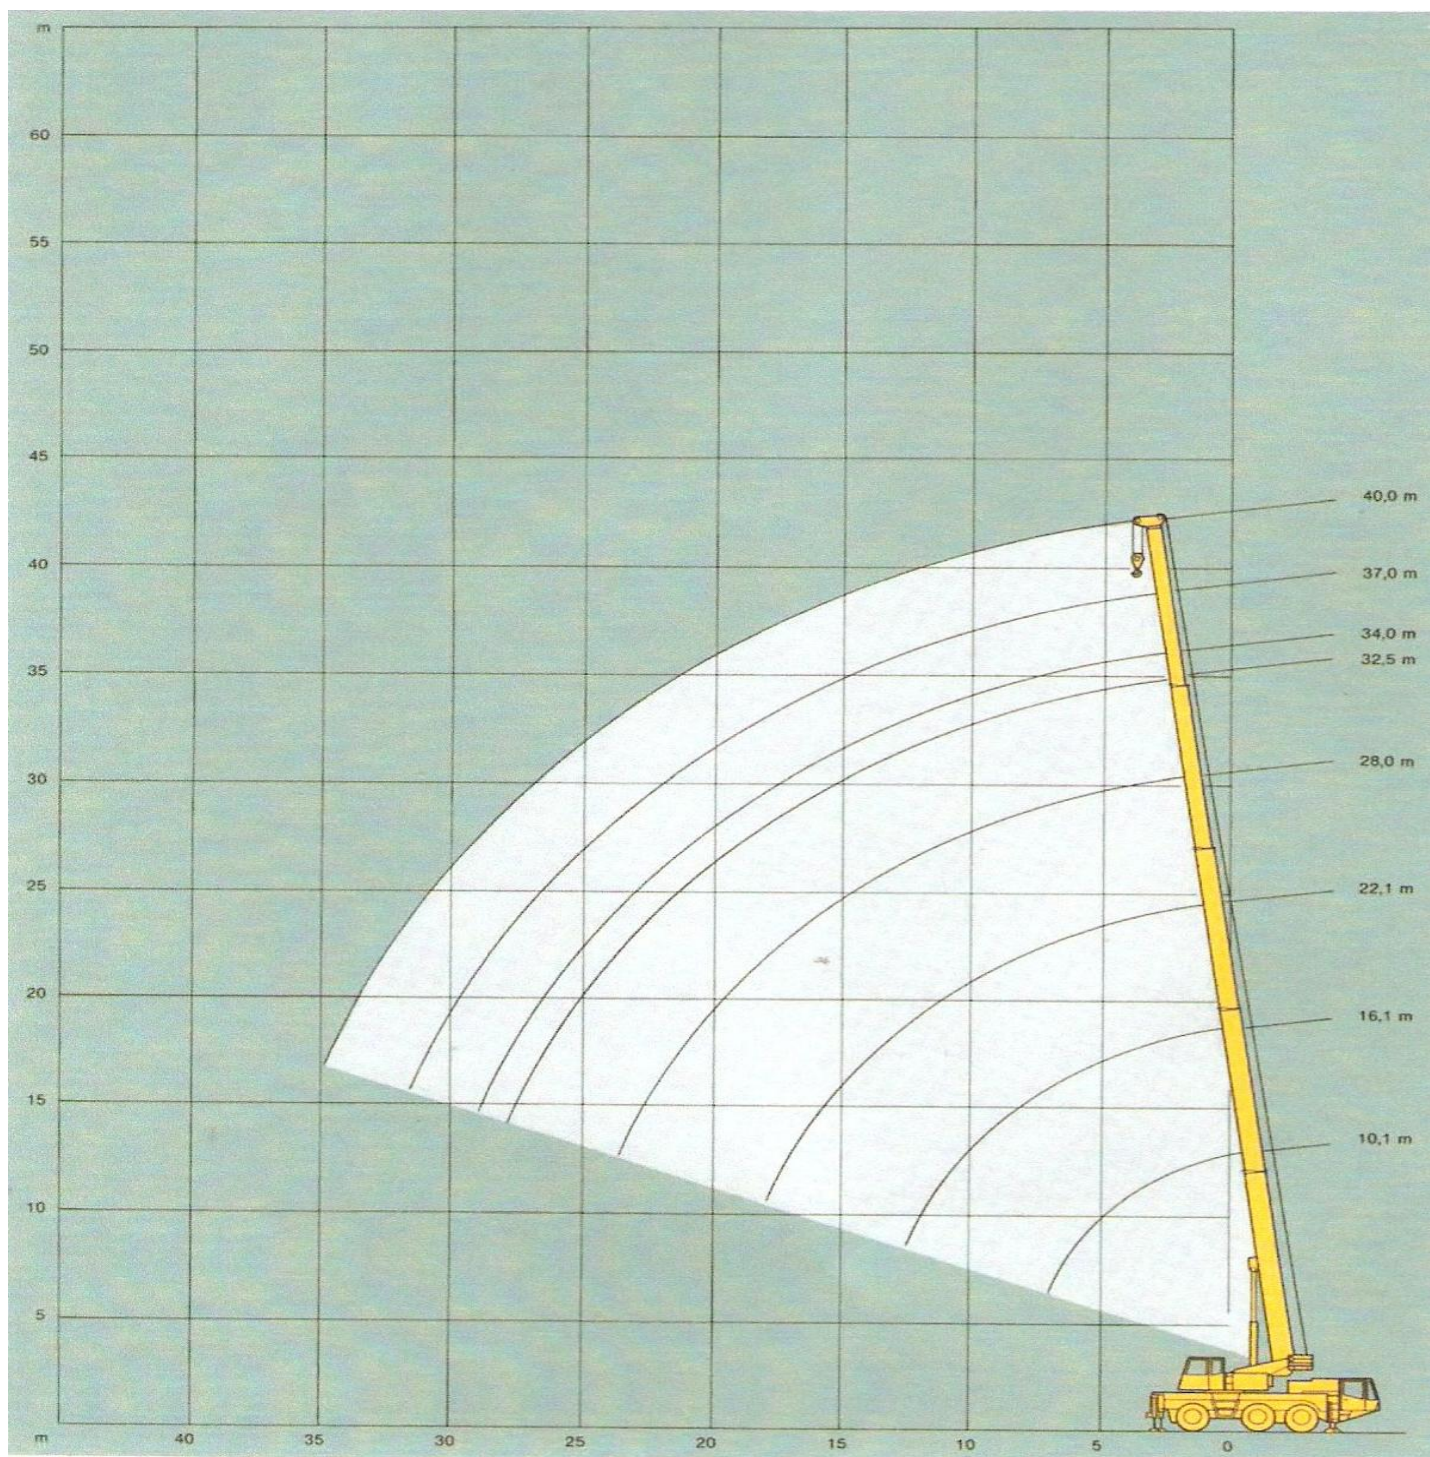

Rango de trabajo extensión de pluma

